
2W05-G 10BAR CONTRACTOR / GENERAL USE WATER SUCTION & DELIVERY HOSE.

General use water suction & delivery hose.

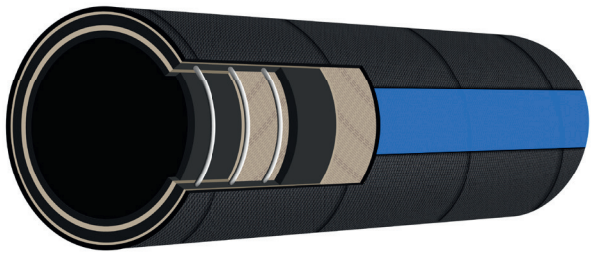

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	20 BAR available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W05-G-032	32	43.3	5.6	10	30	200	1.12	61
2W05-G-038	38	49.3	5.6	10	30	230	1.29	61
2W05-G-051	51	62.3	5.6	10	30	310	1.67	61
2W05-G-063	63	75.7	6.3	10	30	380	2.40	61
2W05-G-076	76	88.7	6.3	10	30	460	2.85	61
2W05-G-102	102	116.0	7.0	10	30	620	4.22	61
2W05-G-127	127	145.1	9.0	10	30	770	7.42	61
2W05-G-152	152	170.1	9.0	10	30	920	8.77	61
2W05-G-203	203	225.6	11.3	10	30	1220	15.12	61

Norms: ISO1307