
2W05-S 10BAR HEAVY DUTY WATER SUCTION & DELIVERY HOSE.

Heavy duty water suction & delivery hose.

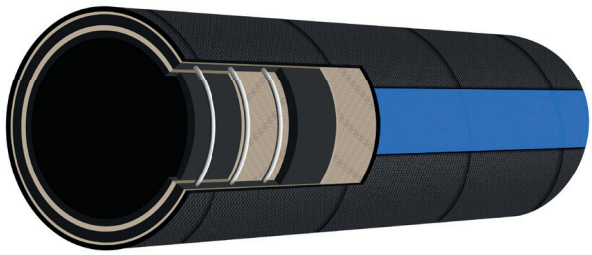

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	-0.85 Bar.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W05-S-032	32	43.9	5.9	10	30	200	1.20	61
2W05-S-038	38	49.9	5.9	10	30	230	1.39	61
2W05-S-051	51	63.5	6.2	10	30	310	1.84	61
2W05-S-063	63	76.8	6.9	10	30	380	2.59	61
2W05-S-076	76	89.8	6.9	10	30	460	3.01	61
2W05-S-102	102	118.7	8.4	10	30	620	4.83	61
2W05-S-127	127	148.9	10.9	10	30	770	8.43	61
2W05-S-152	152	173.9	10.9	10	30	920	9.95	61
2W05-S-203	203	229.8	13.4	10	30	1220	16.59	61
2W05-S-254	254	285.0	15.5	10	30	1530	23.35	12
2W05-S-305	305	339.6	17.3	10	30	1830	30.18	12

Norms: ISO1307