
2W54-C 20BAR SEAWATER DELIVERY HOSE.

Seawater water delivery hose.

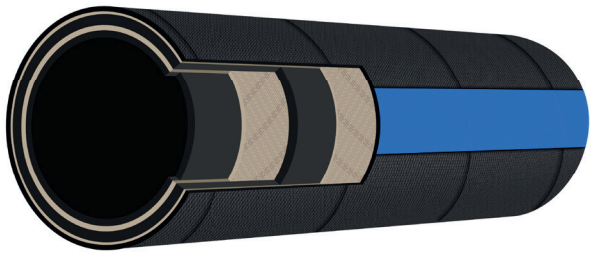

Temperature range:	-30°C +90°C.
Electrical continuity:	N/A.
Lining:	Black chloroprene rubber (CR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W54-C-032	32	41.8	4.9	20	60	-	0.74	61
2W54-C-038	38	47.8	4.9	20	60	-	0.86	61
2W54-C-051	51	61.2	5.1	20	60	-	1.15	61
2W54-C-063	63	73.2	5.1	20	60	-	1.39	61
2W54-C-076	76	88.4	6.2	20	60	-	2.05	61
2W54-C-102	102	117.6	7.8	20	60	-	3.37	61
2W54-C-127	127	142.6	7.8	20	60	-	4.13	61
2W54-C-152	152	170.6	9.3	20	60	-	5.75	61
2W54-C-203	203	224.0	10.5	20	60	-	8.68	61
2W54-C-254	254	278.0	12.0	20	60	-	12.14	12
2W54-C-305	305	334.4	14.7	20	60	-	17.81	12

Norms: ISO1307