
2W54-E 20BAR HOT WATER / MULTIPURPOSE WATER DELIVERY HOSE.

Multipurpose & hot water delivery hose.

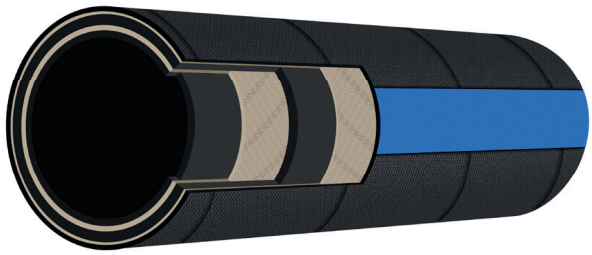

Temperature range:	-30°C +120°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (EPDM). High temperature and weather resistant.
Working pressure:	20 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W54-E-032	32	41.8	4.9	20	60	-	0.73	61
2W54-E-038	38	47.8	4.9	20	60	-	0.85	61
2W54-E-051	51	61.2	5.1	20	60	-	1.13	61
2W54-E-063	63	73.2	5.1	20	60	-	1.36	61
2W54-E-076	76	88.4	6.2	20	60	-	2.03	61
2W54-E-102	102	117.6	7.8	20	60	-	3.32	61
2W54-E-127	127	142.6	7.8	20	60	-	4.08	61
2W54-E-152	152	170.6	9.3	20	60	-	5.69	61
2W54-E-203	203	224.0	10.5	20	60	-	8.57	61
2W54-E-254	254	278.0	12.0	20	60	-	12.01	12
2W54-E-305	305	334.4	14.7	20	60	-	17.62	12

Norms: ISO1307