
2W55-C 10BAR SEAWATER DELIVERY HOSE.

Premium quality seawater water delivery hose.

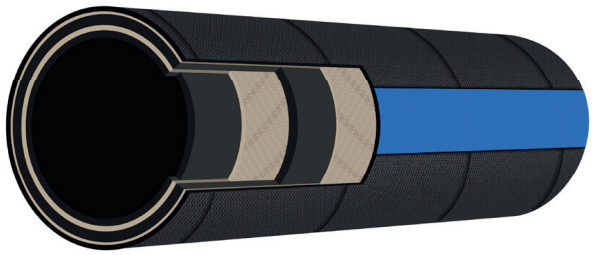

Temperature range:	-30°C +90°C.
Electrical continuity:	N/A.
Lining:	Black chloroprene rubber (CR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth chloroprene rubber (CR), oil, abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W55-C-032	32	41.2	4.6	10	30	-	0.71	61
2W55-C-038	38	47.2	4.6	10	30	-	0.83	61
2W55-C-051	51	60.8	4.9	10	30	-	1.12	61
2W55-C-063	63	72.8	4.9	10	30	-	1.36	61
2W55-C-076	76	85.8	4.9	10	30	-	1.63	61
2W55-C-102	102	114.6	6.3	10	30	-	2.77	61
2W55-C-127	127	139.6	6.3	10	30	-	3.40	61
2W55-C-152	152	166.8	7.4	10	30	-	4.76	61
2W55-C-203	203	221.0	9.0	10	30	-	7.55	61
2W55-C-254	254	272.0	9.0	10	30	-	9.36	12
2W55-C-305	305	328.4	11.7	10	30	-	14.46	12

Norms: ISO1307