
2W55-E 10BAR HOT WATER / MULTIPURPOSE WATER DELIVERY HOSE.

Multipurpose & hot water delivery hose.

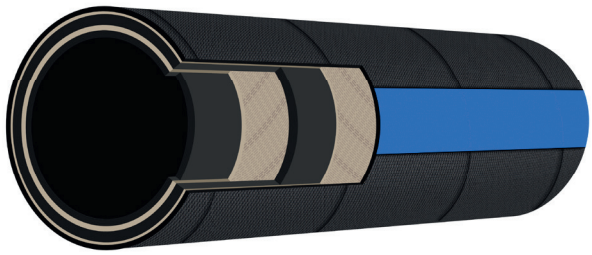

Temperature range:	-30°C +120°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (EPDM).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (EPDM). High temperature and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W55-E-032	32	41.2	4.6	10	30	-	0.70	61
2W55-E-038	38	47.2	4.6	10	30	-	0.82	61
2W55-E-051	51	60.8	4.9	10	30	-	1.10	61
2W55-E-063	63	72.8	4.9	10	30	-	1.33	61
2W55-E-076	76	85.8	4.9	10	30	-	1.61	61
2W55-E-102	102	114.6	6.3	10	30	-	2.73	61
2W55-E-127	127	139.6	6.3	10	30	-	3.35	61
2W55-E-152	152	166.8	7.4	10	30	-	4.70	61
2W55-E-203	203	221.0	9.0	10	30	-	7.44	61
2W55-E-254	254	272.0	9.0	10	30	-	9.23	12
2W55-E-305	305	328.4	11.7	10	30	-	14.27	12

Norms: ISO1307