
2W55-G 10BAR CONTRACTOR / GENERAL USE WATER DELIVERY HOSE.

General use water delivery hose.

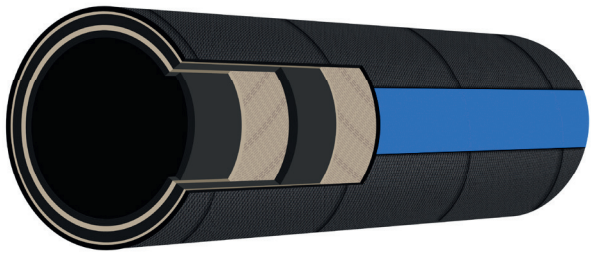

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	20 BAR available on request.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W55-G-032	32	41.8	4.9	10	30	-	0.84	61
2W55-G-038	38	47.8	4.9	10	30	-	0.98	61
2W55-G-051	51	60.8	4.9	10	30	-	1.27	61
2W55-G-063	63	72.8	4.9	10	30	-	1.54	61
2W55-G-076	76	85.8	4.9	10	30	-	1.83	61
2W55-G-102	102	113.0	5.5	10	30	-	2.76	61
2W55-G-127	127	139.2	6.1	10	30	-	3.85	61
2W55-G-152	152	165.4	6.7	10	30	-	5.07	61
2W55-G-203	203	219.0	8.0	10	30	-	7.64	61

Norms: ISO1307