
2W55-S 10BAR HEAVY DUTY WATER DELIVERY HOSE.

Heavy duty water delivery hose.

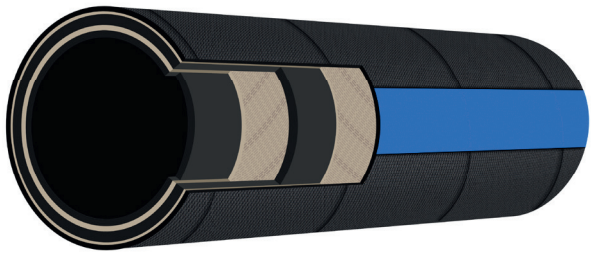

Temperature range:	-30°C +80°C.
Electrical continuity:	N/A.
Lining:	Black synthetic rubber (SBR).
Reinforcement:	High tensile polyester tyre cord.
Cover:	Black smooth synthetic rubber (SBR). Abrasion and weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.
Options:	

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
№	mm	mm	mm	bar	bar	mm	kg/m	m
2W55-S-032	32	41.2	4.6	10	30	-	0.81	61
2W55-S-038	38	47.2	4.6	10	30	-	0.95	61
2W55-S-051	51	60.8	4.9	10	30	-	1.27	61
2W55-S-063	63	72.8	4.9	10	30	-	1.54	61
2W55-S-076	76	85.8	4.9	10	30	-	1.78	61
2W55-S-102	102	114.6	6.3	10	30	-	3.06	61
2W55-S-127	127	139.6	6.3	10	30	-	3.76	61
2W55-S-152	152	166.8	7.4	10	30	-	5.19	61
2W55-S-203	203	221.0	9.0	10	30	-	8.32	61
2W55-S-254	254	272.0	9.0	10	30	-	10.31	12
2W55-S-305	305	328.4	11.7	10	30	-	15.89	12

Norms: ISO1307