


4F05F 10 BAR JUICE AND FATTY FOOD STUFF SUCTION & DELIVERY

Suction & Delivery hose for juice and fatty food stuffs

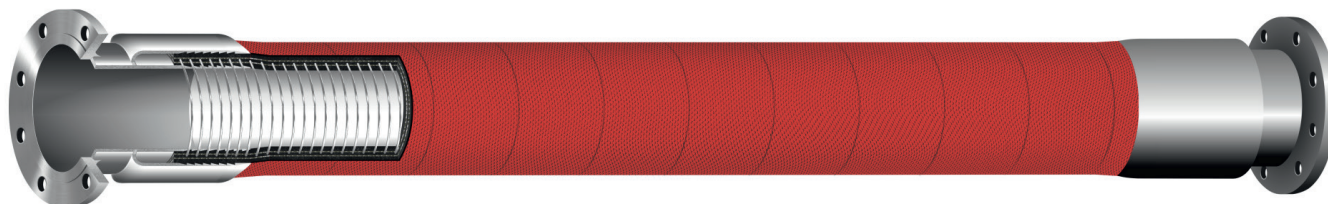

Temperature range:	-30°C. +80°C. suitable for steam cleaning at 130 degC for up to 20 minutes
Electrical continuity:	N/A.
Lining:	White natural rubber (NR), non-toxic, non-tainting. 177:2600 compliant.
Reinforcement:	High tenacity polyester tyre cord. High tensile steel wire helix (BS EN 10324:2004).
Cover:	Red smooth synthetic rubber (SBR). Abrasion / weather resistant.
Brand:	As per customer requirements.
Ends:	Stainless steel swaged hose tails with flanges.
Options:	See page 214 for fitting options.

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Test pressure	Vacuum pressure	Min. bend. radius	Hose weight	Assy weight	Max. avail. length
Nº	mm	mm	mm	bar	bar	bar	bar	mm	kg/m	kg/10m	m
4F05F-102	102	122.1	10.1	10	30	15	-0.85	610	5	76	61
4F05F-127	127	150.9	11.9	10	30	15	-0.85	760	8	123	61
4F05F-152	152	178.9	13.4	10	30	15	-0.85	910	11	162	61
4F05F-203	203	232.4	14.7	10	30	15	-0.85	1210	17	246	40

Norms: ISO 1307, EG1935/2004, EG2023/2006,