


4F55-B 10BAR BEER / WINE DELIVERY.

Delivery hose for BEER / WINE and other beverage fluids - meets the requirements of EG1935/2004, EC 2023/2006, FDA 21 CFR 177.2600 requirements.

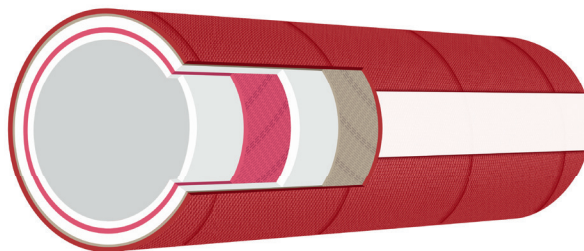

Temperature range:	-30°C +90°C. Suitable for steam cleaning, max. 130°C.
Electrical continuity:	N/A.
Lining:	White nitrile rubber (NBR), non-toxic, non-tainting. FDA 177:2600 compliant.
Reinforcement:	High tensile polyester tyre cord.
Cover:	Red smooth synthetic rubber (EPDM). Abrasion / weather resistant.
Working pressure:	10 Bar. 3:1 Safety factor.
Vacuum pressure:	N/A.
Brand:	As per customer request.
Ends:	Plain ends.

Options:

Hose article	Inside diameter	Outside diameter	Wall thickness	Working pressure	Burst pressure	Min. bending radius	Hose weight	Max. available length
Nº	mm	mm	mm	bar	bar	mm	kg/m	m
4F55-B-019	19	30.6	5.8	10	30	-	0.63	61
4F55-B-025	25	36.6	5.8	10	30	-	0.78	61
4F55-B-032	32	43.6	5.8	10	30	-	0.96	61
4F55-B-038	38	50.2	6.1	10	30	-	1.14	61
4F55-B-051	51	64.8	6.9	10	30	-	1.67	61
4F55-B-063	63	76.4	6.7	10	30	-	1.98	61
4F55-B-076	76	91.0	7.5	10	30	-	2.62	61
4F55-B-080	80	96.0	8.0	10	30	-	3.15	61
4F55-B-102	102	118.2	8.1	10	30	-	3.74	61

Norms: ISO 1307, EG1935/2004, EG2023/2006